
This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS									
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED				
1		released from production.	11/30/2016	RJC	JAG				



NOTE: REF. RBEL135M-2905-101 REV 8.

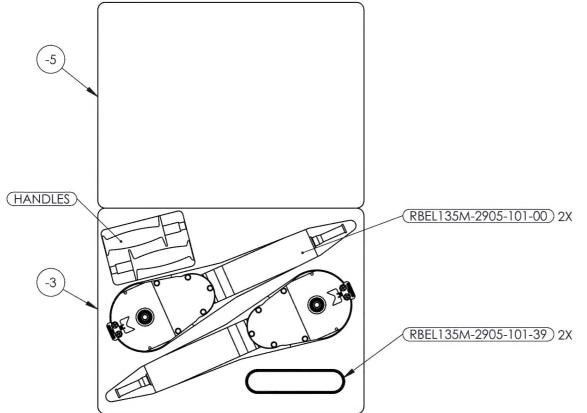

HYDRAULIC PUMP DRIVE TOOL

RBEL135M-2905-101M

THERWISE SPECIF	IED
IONS ARE IN INCHE	S
FRACTIONS ± 1/8	
ANGLES ±.5°	

AS Q	SY A	YZZY QTY	8/0	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.		EAT REAT NISH					
					2	HYDRAULIC PUMP DRIVE TOOL		RBEL135M-2905-101-00		-	PEC				ALL SHARP EDGES	
			B/O	-1	1	CASE	PLASTIC	PELICAN STORM #APP-iM2700-E	N/S		RAWN BY:	CLOUGH	-		° OR .015R ONAL LIMITS APPLY	
	_		0.10	_	-	DOTTOM TOOL OUR HOLD	ETHAFO ALL OCO DI ACK	(V 17 1/4 V 00 1/4	-	_СН	HECKED:	DUERFE	LDT	AFTER F	LATING	
			B/O	-3	ı	BOTTOM TOOL CUSHION	ETHAFOAM 220, BLACK	6 X 17-1/4 X 22-1/4 (CASE SOLUTIONS)	- 2	OP	PPS APPR:	ANDERSON			3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
			B/O	-5	1	TOP TOOL CUSHION	ETHAFOAM 220, BLACK	2 X 17-1/4 X 22-1/4 (CASE SOLUTIONS)	3	QA	A APPR:	LINDSAY	/		USED ON MODEL	
			B/O		1	PLACARD	ALUMINUM	RB41011	N/S	AP	PPROVED:	GILBERT			EC135	
					2	POLY-V GROOVE BELT	NEOPRENE	RBEL135M-2905-101-39	1	S	SCALE	1:8	DATE	11/30/2016	SHEET 1 OF 3	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR. REV ECR 11.52 58 57 21.03 10. -2X R.46 17.15 -16.54 15.68 4X R.38 15.48 14.99 12.66 - 13.26 12.59 4X R.25 11.58 - 10.78 11.12 9.86 9.72 -9.81 9.09 8.07 -7.34 -- 7.44 7.30 -2X R2.92 \(\pi\) 2.50 6.38 - 5.57 4.56 3.90 - 4X R.13 2X 2.70 1.68 1.47 -2X R1.00 √ .80 0 4X R.62 18.23-19.55-20.73-21.16-22.15-11.92 16.10 11 6.00


(-3)

BOTTOM TOOL CUSHION

− 4X 2°

4X .75 —







HYDRAULIC PUMP DRIVE TOOL

RBEL135M-2905-101M-3 MAT'L ETHAFOAM 220, BLACK UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
.XXX ± .005 FRACTIONS ± 1/8

.XX ± .01 .X ± .1 ANGLES ±.5° SURFACES = 125/ SPEC 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 DRAWN BY: PERRITT CHECKED: DUERFELDT OPPS APPR: ANDERSON QA APPR: LINDSAY USED ON MODEL APPROVED: GILBERT **EUROCOPTER EC135** SCALE

4/23/2010 SHEET 2 OF 3 1:6

